

HT-BL01-XY

info@skyled.pk

BUBBLE FLOOD LIGHT



Flood Lights are designed to provide powerful, wide-angle illumination for outdoor and commercial areas. Made with durable housing and high-brightness LED chips ensures long-lasting performance with low energy consumption

HT-BL01-XY

info@skyled.pk

Bubble Flood Light				
General Characteristics				
Product Code:	HT-FL01-50W	HT-FL01-100W	HT-FL01-150W	HT-FL01-200W
Material:	PC Lens	PC Lens	PC Lens	PC Lens
Grade:	Industrial	Industrial	Industrial	Industrial
Rated Life:	20,000 hours	20,000 hours	20,000 hours	20,000 hours
Protection:	IP 66	IP 66	IP 66	IP 66
Warranty:	01 Years	01 Years	01 Years	01 Years
Make:	SKYLED	SKYLED	SKYLED	SKYLED
Size:	185x145x23.8	245x190x23.8	305x231x23.8	355x260x23.8
Optical Characteristics				
Beam Angle:	90°	90°	90°	90°
Color (CCT):	6500K	6500K	6500K	6500K
CRI:	> 80	> 80	> 80	> 80
Source:				
LOR:	>80%	>80%	>80%	>80%
Lumens:	110Lm/W	110Lm/W	110Lm/W	110Lm/W
Cover Optics	PC Lens	PC Lens	PC Lens	PC Lens
Electrical Characteristics				
Wattage:	50W	100W	150W	200W
LED Driver:	Driver on Board	Driver on Board	Driver on Board	Driver on Board
Input Voltage:	AC 220V TO 240V			
Frequency:	50 TO 60Hz	50 TO 60Hz	50 TO 60Hz	50 TO 60Hz
Working Temp:	-20° C - 45° C			
Power Factor:	>0.9	>0.9	>0.9	>0.9
Energy Saving:	Up to 70%	Up to 70%	Up to 70%	Up to 70%
Compliance:	PS CE, RoHS	PS CE, RoHS	PS CE, RoHS	PS CE, RoHS

HT-B01-XY

info@skyled.pk

Application:


Residential, Parks

Parking

Boundary Walls



Wattage	50W	100W	150W	200W
Size:	220x185x24	275x240x30	305x231x23.8	355x260x23.8

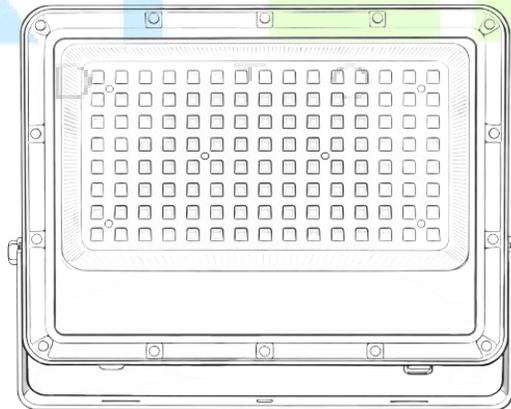

Safety First

Turn off the power at the main circuit breaker, not just the wall switch.

Use a voltage tester to confirm the fixture is dead before touching wires.

Turn the power back ON.