

HT-CL03-XY

info@skyled.pk

COB DOWN LIGHT
LUKSUS SERIES



COB LED Down Light provides bright, focused, and uniform illumination with a sleek modern design. It uses high-efficiency COB chips to deliver strong light output while consuming less energy

COB LED Down Light Luksus series		
General Characteristics		
Product Code:	HT-CL01-8W	HT-CL01-12W
Material:	Aluminum + PC	Aluminum + PC
Grade:	Interior	Interior
Rated Life:	35,000 hours	35,000 hours
Protection:	IP 44	IP 44
Warranty:	02 Years	02 Years
Make:	SKYLED	SKYLED
Cut Out Size(mm):	75	75
DXH:	85x85	85x85
Optical Characteristics		
Beam Angle:	20°	20°
Color (CCT):	3000K, 4000k,6500K	3000K,4000k, 6500K
CRI:	> 80	> 80
Source:	Epistar/Bridgelux	Epistar/Bridgelux
LOR:	>85%	>85%
Lumens:	80-90Lm/W	80-90Lm/W
Cover Optics	PC Lens	PC Lens
Electrical Characteristics		
Wattage:	8W	12W
LED Driver:	SKYLED	SKYLED
Input Voltage:	AC 100V to 250V	AC 100V to 250V
Frequency:	50/60 Hz	50/60 Hz
Working Temp:	-40° C TO 55° C	-40° C TO 55° C
Power Factor:	>0.9	>0.9
Energy Saving:	Up to 80%	Up to 80%
Compliance:	PS, CE, RoHS	PS, CE, RoHS

HT-CL01-XY


info@skyled.pk

Application:

Homes

Office, Showroom

Hotels

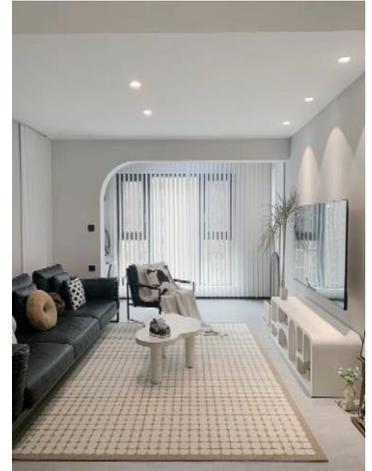

Wattage:	8W	12W
Cut Out :	75mm	75mm
Outer Size:	85mm	85mm
Height:	85mm	85mm

N D T O S A V E



Safety First

Turn off the power at the main circuit breaker, not just the wall switch.
Use a voltage tester to confirm the fixture is dead before touching wires.

Turn the power back ON.